



shreeji
enterprises

QuickOne™

STRONG DURABLE BOND

COMPREHENSIVE RANGE OF TILING AND GROUTING SOLUTIONS



**FIBRE
POWER**
STRONG & FLEXIBLE



LONGEST
SHELF LIFE

- FLEXIBLE RAPID SET
- HIGHLY POLYMER MODIFIED

Non-toxic and Flexible • Frost & Water Resistant



About **SHREEJI ENTERPRISES**

Shreeji Enterprises is a leading manufacturer of high-quality tile adhesives and Construction chemicals, designed to meet the needs of both professionals and DIY enthusiasts under the brand name of **QuickOne**. We are established in **Hanumangarh (Rajasthan)** and placed in **7 states** of around India. With over 12 years of experience in the industry, we provide innovative, reliable, and durable adhesive solutions for all types of tiling projects. Whether it's for residential, commercial, or industrial applications, we offer a comprehensive range of products that ensure perfect results every time.

VISION

We aspire to be the go-to brand for tile adhesives, known for our commitment to quality, customer satisfaction, and sustainability. Our vision is to continually innovate, providing solutions that not only meet but exceed the evolving demands of the tiling industry.

MISSION

Our mission is to provide top-tier tile adhesive products that guarantee lasting strength and performance. We aim to simplify the tiling process by offering easy-to-use, high-performance solutions that ensure tiles stay securely in place, regardless of the surface or conditions.

OUR VALUES

- **Quality**
We use only the highest quality raw materials and advanced manufacturing processes to ensure that every batch of adhesive we produce is of the highest standard.
- **Innovation**
Constantly researching and developing new formulas, we strive to offer the latest in adhesive technology, ensuring our customers have access to the best solutions available.

- **Customer Focus**

We pride ourselves on understanding our customers' needs and providing products that deliver exceptional results and ease of use.

- **Sustainability**

We are committed to produce environment friendly adhesives that meet industry standards while minimizing our ecological footprint.

INFRASTRUCTURE & RESOURCES

We pride ourselves on our state-of-the-art infrastructure that ensures the production of high- quality, reliable tile adhesives. Our facilities are equipped with the latest technology, designed to streamline manufacturing processes, maintain product consistency, and ensure that every batch of adhesive meets industry standards. We have invested heavily in our infrastructure to create a seamless workflow, from raw material sourcing to product delivery.

MANUFACTURING FACILITIES

Our advanced manufacturing plant is located in Hanumangarh, spanning over 25000 square feet, produce 30 tons material everyday and is built to meet the highest quality standards. We utilize fully automated production lines, ensuring precision and consistency in every batch of tile adhesive.

The production facility is capable of handling large-scale orders while maintaining product integrity, with stringent quality control procedures at every stage.

RESEARCH AND DEVELOPMENT (R&D)

Innovation is key to our continued success, and our **R&D Department** plays a critical role in ensuring that we stay at the forefront of tile adhesive technology. Our experienced team of chemists and product developers work tirelessly to create new formulations that improve performance, enhance ease of application, and meet the latest market demands.

- **Laboratory Facilities**

Our lab is equipped with advanced testing and analysis equipment, enabling us to develop and refine products with precision. We test adhesives for factors like bonding strength, flexibility, water resistance, and drying time, ensuring they meet or exceed industry standards.

- **Product Testing**

We perform both in-house and field tests to evaluate the performance of our adhesives in real-world conditions, from residential to commercial and industrial environments.

QUALITY CONTROL

Quality assurance is an integral part of our operations. We maintain a strict quality control system that monitors each phase of production, from raw material inspection to finished product packaging. Our team conducts thorough testing, ensuring that every product adheres to our high standards of performance, durability, and safety.

- **ISO Certification**

We are ISO 9001 certified, ensuring that all of our processes meet international standards for quality management.

- **Continuous Monitoring**

Our quality control team regularly tests raw materials, in-process products, and final goods to ensure they meet the required specifications for adhesion, strength, and environmental compatibility.



WHY CHOOSE US?

- **Proven Performance**
Our adhesives are trusted by professionals through out India for their strength, durability, and ease of application.
- **Wide Range of Solutions**
No matter the type of tile, substrate, or environment, we have an adhesive designed for your specific needs.
- **Easy Application**
Our products are designed for simple mixing and application, allowing for faster and more efficient tiling.
- **Cost-Effective**
We offer high-performance adhesives at competitive prices, ensuring that you get the best value for your investment.

SUSTAINABILITY COMMITMENT

We are proud to offer eco-friendly adhesives made with low-VOC (Volatile Organic Compound) content, ensuring both safety and environmental protection. Our production methods aim to minimize waste and reduce energy consumption, contributing to a sustainable future.

VARUN JINDAL
Proprietor

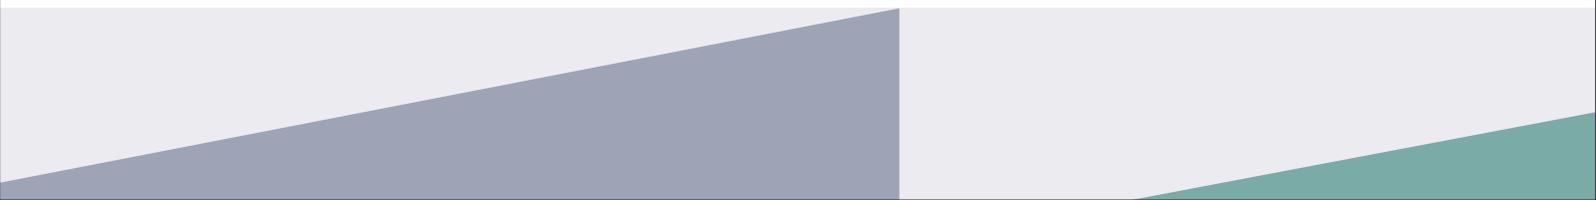


Table of Contents

Architectural Drawings	06
Tile Adhesives	09
Stone Adhesive	13
Epoxy Grout	15
Tile Grout	17
Tile Grout Admixture	19
Tile Cleaner	20
Tile Spacer	21
Distribution Network	22

Innovations in Tile Fixing Process by Experts

ADVANCEMENT IN TECHNICAL STANDARDS


OLD	
INDIAN STANDARDS IS15477:2004	
Type I (T1)	Type II (T2)

NEW				
INDIAN STANDARDS IS15477:2019				
Type I (T1)	Type II (T2)	Type III (T3)	Type IV (T4)	Type V (T5)

Standards evolved as per new trends in tiles and applications

EN 12004/ ISO 13007 STANDARDS		C/R 1/2 T E S1/2
TYPE	CLASSES	SPECIAL CHARACTERISTICS
C = Cementitious	1 = Normal performance	T = Slip-resistant
R = Resinous	2 = Improved performance	E = Extended open time
		S1 = Deformable (2.5-5 mm)
		S2 = Highly deformable (> 5 mm)

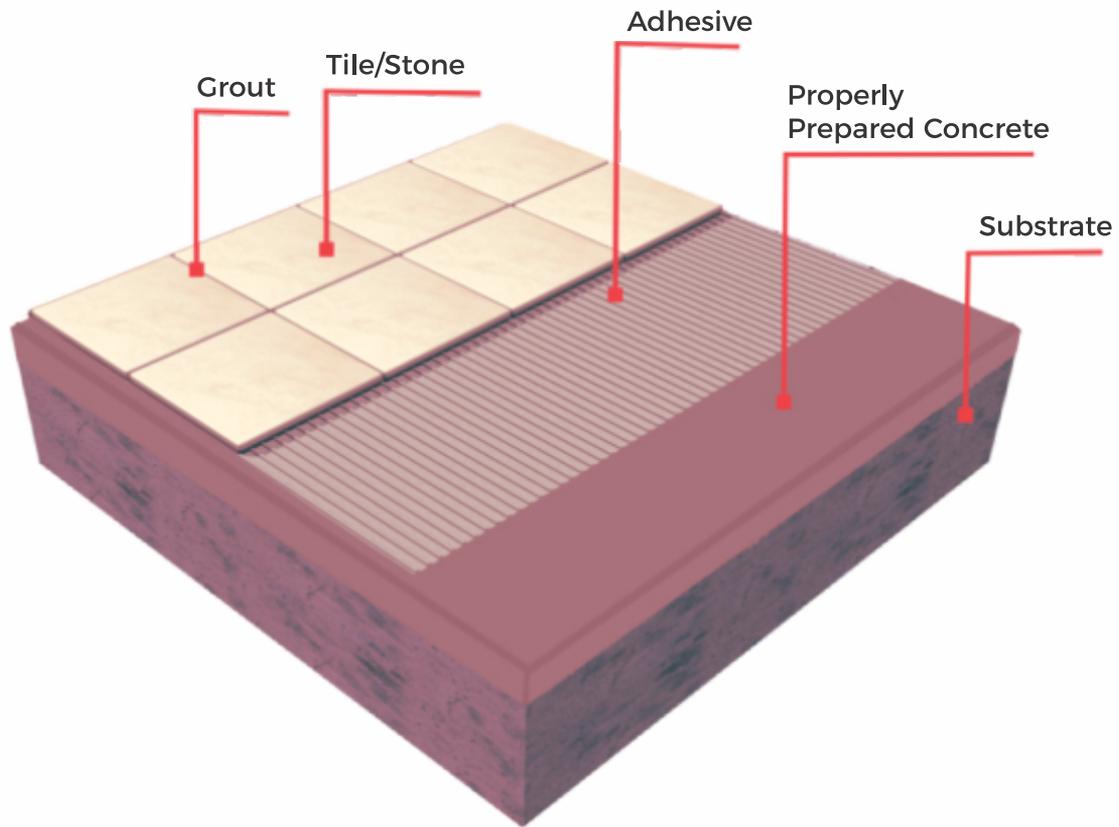
Architectural Designs



Facade System



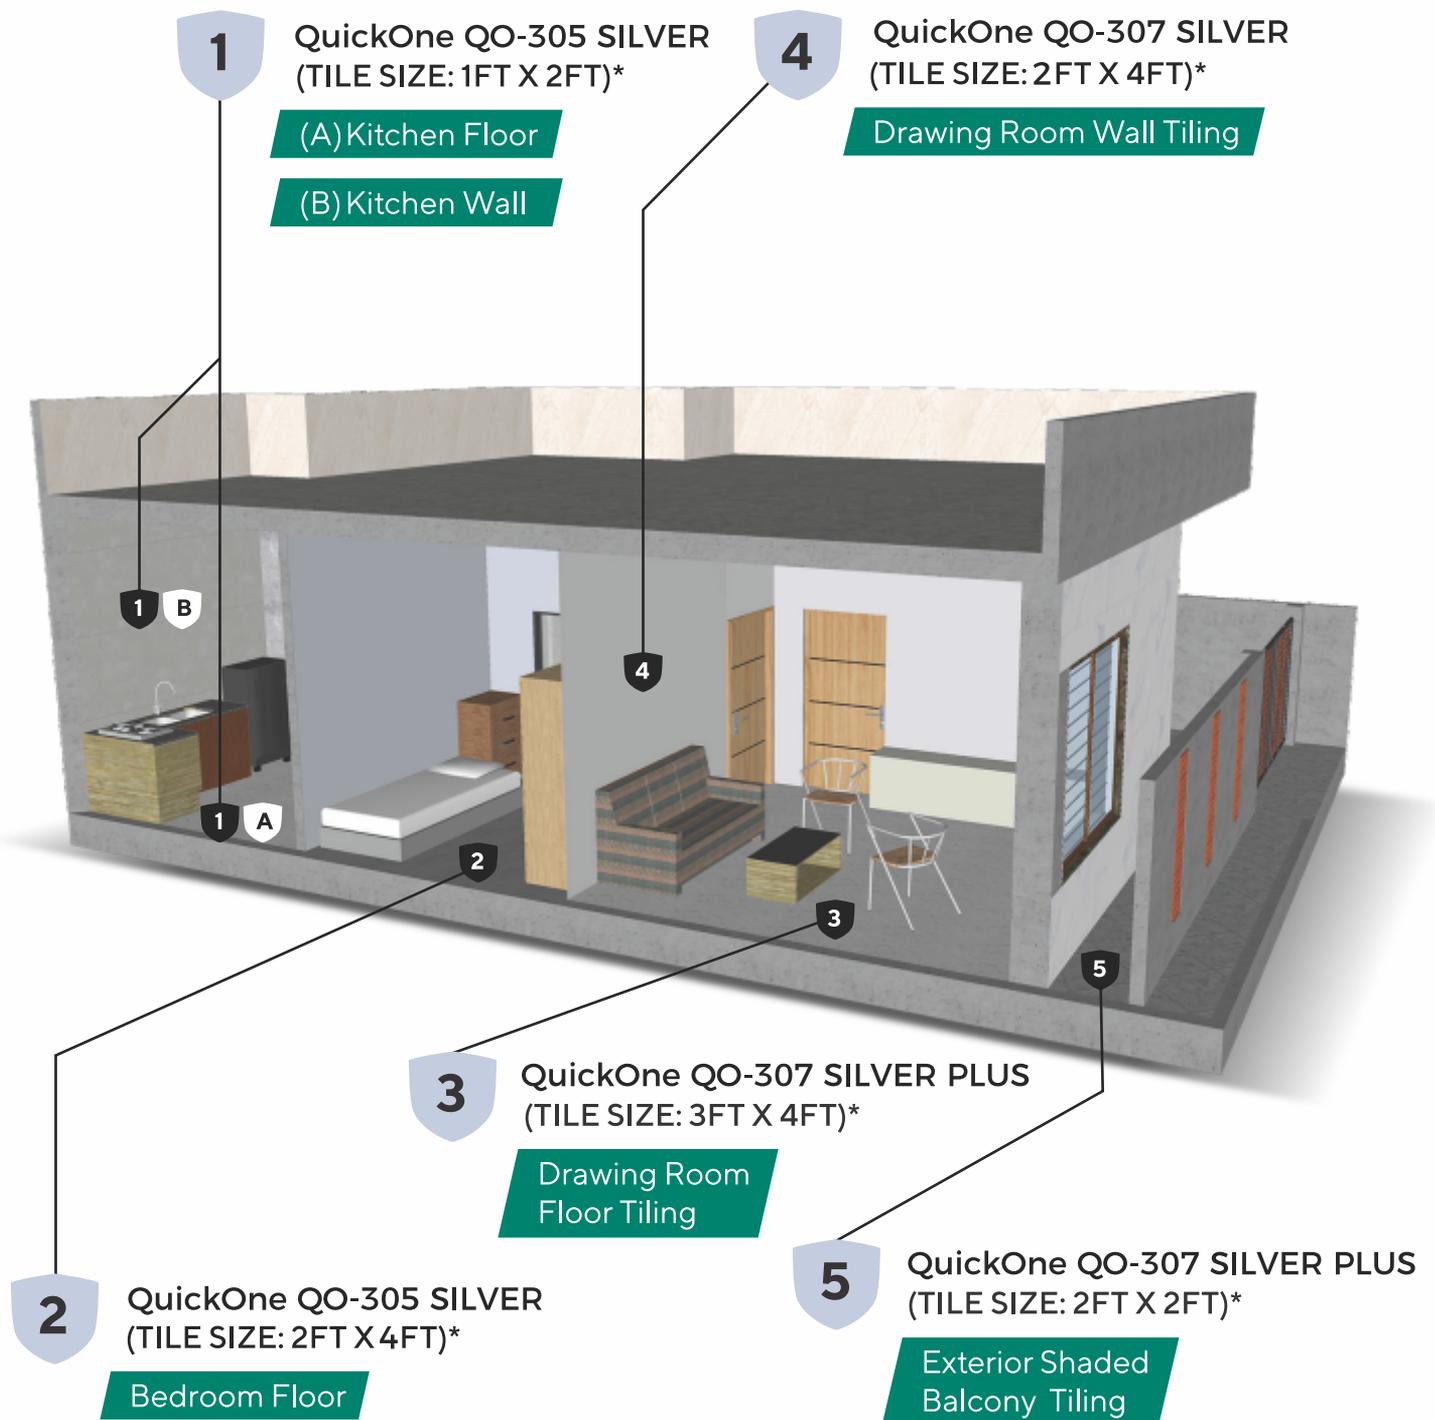Architectural Drawings for Residential Area - 1 BHK HOUSE AND PREMIUM BUNGALOW



7

QuickOne QO STAIN FREE EPOXY GROUT GROUTING

Bathroom Floor

6

QuickOne QO 315 GOLDEN WHITE (TILE SIZE: 6FT X 8FT)*

Bathroom Floor

5

QuickOne QO 325 PLATINUM GREY (TILE SIZE: 6FT X 8FT)*

Bathroom Wall



1

QuickOne QO 335 (Stone Fix)

Natural Stone Fixing (Exterior)

2

QuickOne STAIN FREE EPOXY GROUT

Epoxy Grouting in Exterior Balcony/Lawn

4

QuickOne QO 325 PLATINUM WHITE Glass Mosaic Tiles in Swimming Pool

3

QuickOne QO 325 PLATINUM WHITE (TILES/STONE SIZE: 6FT X 8FT)*

(A) Large Format Tiles in Drawing Room

(B) Marble Flooring in Dining Room

SILVER (QO-305)

(Cementitious Based Polymer Modified Tile Adhesive (Grey) for Ceramic Tiles Interior Use Only)

Silver QO-305 is a cementitious polymer tile adhesive in grey colour, designed for fixing ceramic tiles and related materials securely onto interior wall (up to 4 feet) and floor surfaces with concrete or cement-plastered substrates, ensuring a lasting bond.

APPLICATION COMPATIBILITY :

SUITABLE SUBSTRATES :

Concrete, Cement Renders, Cement Screeds

*Subject to porosity of the surface, in case of low absorption, it is recommended to use ADMIXTURE prior to the tile installation.

SUITABLE LAYING MATERIAL:

Ceramic & Cement Mosaic Tiles

**IS 15622: 2006 – Pressed Ceramic Tiles Specifications.

MIXING:

Silver QO-305 Powder is to be mixed with water with a ratio of 3:1 to create a smooth paste, allow the paste stand for 7 to 10 minutes to polymer get activated. Then remix the material and apply with a notch trowel for more grip.

RECOMMENDED USAGE :



Vertical : 4-8 mm
Horizontal : 3-6 mm



Interior : Vertical & Horizontal

PRODUCT KEY FEATURES :



Slip Resistant



Easy to Apply



Cost Efficient



Strong Bonding Capabilities



Low VOC

COVERAGE :

Silver QO-305 covers approx 30-35 sq. feet on any surface at 3mm thickness

SHELF LIFE :

Store above floor level in a cool dry place for up to 12 months

PACKAGING :

20 Kg. bag

TECHNICAL INFORMATION :

Appearance	: Grey Powder
Bulk Density	: 1450 to 1550 kg/m ³
Mixed Density	: NA
Water Demand @ 27 ± 2°C (Ambient & Water Temp.)	: 21 ± 2% (by weight)
Pot Life @ 27 ± 2°C	: 50 minutes ± 10 minutes
Open Time @ 27 ± 2°C	: 10 - 15 minutes
Adjustment Time @ 27 ± 2°C	: 5 - 15 minutes
Light Foot Traffic @ 27 ± 2°C	: 24 hours
Tensile Adhesion Strength (Dry conditions @ 28 days)	: ≥ 0.60 N/mm ²
Shear Adhesion Strength (Dry conditions @ 28 days)	: ≥ 1.0 N/mm ²
Deformability	: NA



IMPORTANT NOTES : Keep the material cool and dry place. Adhesive should not be placed to direct sunlight. Performance of product may vary from site to site because of different weather conditions. Company will not be responsible for failure due to any in proper usage and application.



SILVER PLUS (QO-307)

(Polymer Modified, Medium/Thin Set Adhesive (Grey) for Interior Wall Tile Installations)

Silver Plus QO-307 is a cement-based polymer modified grey color tile adhesive which offers dual bonding strength and excellent work ability. Specifically designed for application on interior wall and floor surfaces made of concrete or cement-plastered substrates with no vertical slip and with extended performance. **Silver Plus QO-307** is ideal for securely fixing ceramic tiles, vitrified tiles and even tile-on-tile applications. To enhance adhesion and flexibility **Silver Plus QO-307** can be mixed with **QuickOne Admixture**

APPLICATION COMPATIBILITY :

SUITABLE SUBSTRATES :

Concrete, Cement Renders, Cement Screeds, Cementitious Waterproof Coatings, Ceramic Tiles, Vitrified Tiles

Subject to porosity of the surface, in case of low absorption, it is recommended to use ADMIXTURE prior to the tile installation.

SUITABLE LAYING MATERIAL:

Ceramic, Clay, Porcelain, Cement Mosaic Tiles and Vitrified Tiles (Group B II). For laying large format tiles on floor, mix **Silver Plus QO-307** with **QuickOne Admixture** during installation.

**IS 15622: 2006 – Pressed Ceramic Tiles Specifications.

MIXING:

Silver Plus QO-307 Powder is to be mixed with water with a ratio of 3:1 to create a smooth paste, allow the paste stand for 7 to 10 minutes to polymer get activated. Then remix the material and apply with a notch trowel for more grip.

RECOMMENDED USAGE :



Vertical : 4-8 mm
Horizontal : 3-6 mm



Interior : Vertical &
Horizontal
Exterior : Horizontal

PRODUCT KEY FEATURES :



Slip Resistant



Superior Workability



Dual Bonding Strength



User Friendly



Suitable for Wet Areas

COVERAGE :

Silver Plus QO-307 covers approx 30-35 sq. ft. on any surface at 3mm thickness

SHELF LIFE :

Store above floor level in a cool dry place for up to 12 months

PACKAGING :

20 Kg. bag

TECHNICAL INFORMATION :

Appearance	: Grey Powder
Bulk Density	: 1520 to 1620 kg/m ³
Mixed Density	: NA
Water Demand @ 27 ± 2°C (Ambient & Water Temp.)	: 22 ± 2% (by weight)
Pot Life @ 27 ± 2°C	: 1 hr. 35 minutes ± 15 minutes
Open Time @ 27 ± 2°C	: 25 - 30 minutes
Adjustment Time @ 27 ± 2°C	: 10 - 20 minutes
Light Foot Traffic @ 27 ± 2°C	: 24 hours
Tensile Adhesion Strength (Dry conditions @ 28 days) :	≥ 0.85 N/mm ²
Shear Adhesion Strength (Dry conditions @ 28 days) :	≥ 1.0 N/mm ²
Deformability	: NA

C1TE

CONFORMS TO
EN 12004 : 2017



TYPE 1T

CONFORMS TO
IS 15477 : 2019



IMPORTANT NOTES : Keep the material cool and dry place. Adhesive should not be placed to direct sunlight. Performance of product may vary from site to site because of different weather conditions. Company will not be responsible for failure due to any in proper usage and application.



GOLDEN (QO-315)

(Polymer Modified, Medium/Thin Set Adhesive (Grey/White)
for Interior and Exterior Wall Tile Installations)

Golden QO-315 is a cement-based polymer modified grey/white colour tile adhesive which offers dual bonding strength and excellent workability. Specifically designed for application on interior and exterior wall and floor surfaces made of concrete or cement-plastered substrates with no vertical slip and with extended performance. **Golden QO-315** is ideal for securely fixing ceramic tiles, vitrified tiles and even tile on Elevation upto 30 feet's height applications. To enhance adhesion and flexibility **Golden QO-315** can be mixed with **QuickOne Admixture**

APPLICATION COMPATIBILITY:

SUITABLE SUBSTRATES:

Concrete, Cement Renders, Cement Screeds, Cementitious Waterproof Coatings, Ceramic Tiles, Vitrified Tiles
Subject to porosity of the surface, in case of low absorption, it is recommended to use ADMIXTURE prior to the tile installation.

SUITABLE LAYING MATERIAL:

Ceramic, Clay, Porcelain, Cement Mosaic Tiles and Vitrified Tiles (Group B II). For laying large format tiles on floor and front elevation upto 30 feet's, mix **Golden QO-315** with **QuickOne Admixture** during installation.

**IS 15622: 2006 – Pressed Ceramic Tiles Specifications.

MIXING:

Golden QO-315 Powder is to be mixed with water with a ratio of 3:1 to create a smooth paste, allow the paste stand for 7 to 10 minutes to polymer get activated. Then remix the material and apply with a notch trowel for more grip.

RECOMMENDED USAGE :



3-12 mm



Interior : Vertical &
Horizontal
Exterior : Horizontal

PRODUCT KEY FEATURES :



Slip
Resistant



Extended
Open Time



Excellent
Dual Bond
Strength



Superior
Workability



Suitable for
Wet Areas

COVERAGE :

Golden QO-315 covers approx 30-35 sq. ft. on any surface at 3mm thickness

SHELF LIFE :

Store above floor level in a cool dry place for up to 12 months

PACKAGING :

20 Kg. bag

TECHNICAL INFORMATION :

Appearance	: Grey White Powder
Bulk Density	: 1435 to 1535 kg/m ³ 1340 to 1440 kg/m ³
Mixed Density	: NA
Water Demand @ 27 ± 2°C (Ambient & Water Temp.)	: 23 ± 2% 28 ± 2% (by weight)
Pot Life @ 27 ± 2°C	: 2 hours 15 minutes ± 15 minutes
Open Time @ 27 ± 2°C	: 25 - 30 minutes
Adjustment Time @ 27 ± 2°C	: 20 - 30 minutes
Light Foot Traffic @ 27 ± 2°C	: 24 hours
Tensile Adhesion Strength (Dry conditions @ 28 days)	: ≥ 1.2 N/mm ²
Shear Adhesion Strength (Dry conditions @ 28 days)	: ≥ 1.3 N/mm ²
Deformability	: NA



IMPORTANT NOTES : Keep the material cool and dry place. Adhesive should not be placed to direct sunlight. Performance of product may vary from site to site because of different weather conditions. Company will not be responsible for failure due to any in proper usage and application .



PLATINUM (QO-325)

(Advanced Impact & Shock Resistant Deformable Adhesive (Grey/White) for Vitrified Tiles, Glass Mosaic)

Platinum QO-325 is a high-strength cement-based polymer-enriched adhesive that has advanced impact and shock resistance characteristics, making it suitable for the installation of tiles on interior and exterior walls, as well as floors. It is ideal for fixing vitrified tiles, glass mosaic of medium to large profile. Also suitable for Cladding and Swimming Pools or all wet areas.

APPLICATION COMPATIBILITY:

SUITABLE SUBSTRATES:

All Cementitious Substrates, Cementitious Waterproof Coatings, Ceramic Tiles, Vitrified Tiles

Subject to porosity of the surface, in case of low absorption, it is recommended to use ADMIXTURE prior to the tile installation.

SUITABLE LAYING MATERIAL:

Ceramic, Clay, Porcelain, Cement Mosaic Tiles, Vitrified Tiles (Group B I & B II), Basalt Tiles, Glass Mosaic/Tiles. For laying large format tiles mix **Platinum QO-325** with **QuickOne Admixture** up to 60 to 80 feet height during installation.

**IS 15622: 2006 – Pressed Ceramic Tiles Specifications.

MIXING:

Platinum QO-325 Powder is to be mixed with water with a ratio of 3:1 to create a smooth paste, allow the paste stand for 7 to 10 minutes to polymer get activated. Then remix the material and apply with a notch trowel for more grip.

RECOMMENDED USAGE :



3-12 mm



Interior & Exterior
Vertical & Horizontal

PRODUCT KEY FEATURES :



Shrinkage &
Crack Resistant



Superior
Workability



Shock and
Impact
Resistant



Industrial
Grade



Extended
Open Time

COVERAGE:

Silver Plus QO-307 covers approx 30-35 sq.feet on any surface at 3mm thickness

SHELF LIFE:

Store above floor level in a cool dry place for up to 12 months

PACKAGING:

20 Kg. bag

TECHNICAL INFORMATION :

Appearance	: Grey White Powder
Bulk Density	: 1380 to 1480 kg/m ³ 1310 to 1410 kg/m ³
Mixed Density	: NA
Water Demand @27 ± 2°C (Ambient & Water Temp.)	: 28 ± 2% 30 ± 2% (by weight)
Pot Life @ 27 ± 2°C	: 2 hours 45 minutes ± 15 minutes
Open Time @ 27 ± 2°C	: 25 - 30 minutes
Adjustment Time @ 27 ± 2°C	: 20 - 30 minutes
Light Foot Traffic @ 27 ± 2°C	: 24 hours
Tensile Adhesion Strength (Dry conditions @ 28 days)	: ≥ 1.65 N/mm ²
Shear Adhesion Strength (Dry conditions @ 28 days)	: ≥ 1.75 N/mm ²
Deformability	: NA

C2TES1

CONFORMS TO
EN 12004 : 2017



TYPE 3TS1

CONFORMS TO
IS 15477 : 2019



IMPORTANT NOTES : Keep the material cool and dry place. Adhesive should not be placed to direct sunlight. Performance of product may vary from site to site because of different weather conditions. Company will not be responsible for failure due to any in proper usage and application.



STONEFIX (QO-335)

(Flexible & Durable Adhesive Designed (Grey/White)
for Heavy & Large Tile & Stone Installations)

StoneFix QO-335 is a high-strength cement-based polymer-enriched adhesive that has advanced impact and shock resistance characteristics, making it suitable for the installation of tiles and natural stones on interior and exterior walls, as well as floors. It is ideal for fixing vitrified tiles, glass mosaic, marble and granite of medium to large profile.

APPLICATION COMPATIBILITY :

SUITABLE SUBSTRATES :

All Cementitious Substrates, Cementitious Waterproof Coatings, Ceramic Tiles, Vitrified Tiles, Natural Stones

Subject to porosity of the surface, in case of low absorption, it is recommended to use ADMIXTURE prior to the tile installation.

SUITABLE LAYING MATERIAL:

Ceramic, Clay, Porcelain, Cement Mosaic Tiles, Vitrified Tiles (Group B I & B II), Basalt Tiles, Natural Stones & Glass Mosaic/Tiles. For laying large format tiles and Natural stones, mix **Stone Fix QO-335** with **QuickOne Admixture** up to 60 to 80 feet height during installation.

**IS 15622: 2006 – Pressed Ceramic Tiles Specifications.

MIXING:

StoneFix QO-335 Powder is to be mixed with water with a ratio of 3:1 to create a smooth paste, allow the paste stand for 7 to 10 minutes to polymer get activated. Then remix the material and apply with a notch trowel for more grip.

RECOMMENDED USAGE :



3-12 mm



Interior & Exterior
Vertical & Horizontal

PRODUCT KEY FEATURES :



Shrinkage &
Crack Resistant



Superior
Workability



Shock and
Impact
Resistant



Industrial
Grade



Extended
Open Time

COVERAGE :

StoneFix QO-335 covers approx 30-35 sq. feet on any surface at 3mm thickness

SHELF LIFE :

Store above floor level in a cool dry place for up to 12 months

PACKAGING :

20 Kg. bag

TECHNICAL INFORMATION :

Appearance	: Grey White Powder
Bulk Density	: 1380 to 1480 kg/m ³ 1310 to 1410 kg/m ³
Mixed Density	: NA
Water Demand @ 27 ± 2°C (Ambient & Water Temp.)	: 28 ± 2% 30 ± 2% (by weight)
Pot Life @ 27 ± 2°C	: 2 hours 45 minutes ± 15 minutes
Open Time @ 27 ± 2°C	: 25 - 30 minutes
Adjustment Time @ 27 ± 2°C	: 20 - 30 minutes
Light Foot Traffic @ 27 ± 2°C	: 24 hours
Tensile Adhesion Strength (Dry conditions @ 28 days)	: ≥ 1.65 N/mm ²
Shear Adhesion Strength (Dry conditions @ 28 days)	: ≥ 1.75 N/mm ²
Deformability	: ≥ 1.2.5 mm & < 5 mm

C2TES2

CONFORMS TO
EN 12004 : 2017



TYPE 3TS2

CONFORMS TO
IS 15477 : 2019



IMPORTANT NOTES : Keep the material cool and dry place. Adhesive should not be placed to direct sunlight. Performance of product may vary from site to site because of different weather conditions. Company will not be responsible for failure due to any in proper usage and application .





shreeji
enterprises



THE ULTIMATE TILING & GROUTING RANGE


QuickOne™
STRONG DURABLE BOND

EPOXY GROUT

HEAVY DUTY EPOXY GROUT

QuickOne Epoxy Grout is a three part component general purpose water clean-up epoxy system for grouting most types of ceramic tiles in demanding environments. It consists of epoxy resin, epoxy hardener and a selected colored fillers.

HOW TO USE:

A) SURFACE PREPARATION:

Before application of **QuickOne Epoxy Grout**, ensures the tile adhesive has set firmly. Remove any loose or foreign material from the grout joints and ensure the grout joints are clean & dry.

B) Mixing:

QuickOne Epoxy Grout is a three component system for onsite mixing. Initially add the epoxy resin to the epoxy hardener to a clean container and mix thoroughly. To this mix while stirring gradually add the powder color grout and mix this until lump free uniform color is achieved.

C) APPLICATION:

Using a rubber squeegee, press the grout firmly into the joints, ensuring that the joints are completely filled. Remove excess grout from the surface of the tiles with the rubber squeegee using a diagonal motion. Clean off the surplus grout from the joints and surface within 10-15 minutes. Use the damp sponge in a circular motion and keep it relative to the surface to achieve the flush joint. Do not allow water to flow or run into ungrouped joints.

D) ADVANTAGES:

- ✓ Easy to use.
- ✓ Ideal for both interior and exterior application.
- ✓ High strength.
- ✓ Chemical resistant.
- ✓ Good abrasion resistant.

PACKING:

1Kg, 5Kg & 10 kg bucket

SHELF LIFE:

12 months from the date of manufacture.

STORAGE:

Store unopened in normal & dry condition.

PRECAUTIONS:

- ✓ Do not add water in to the **QuickOne Epoxy Grout**
- ✓ Do not apply on wet/damp tile joints.
- ✓ Do not over-mix the material.
- ✓ Ensure adequate ventilation during application in working place.
- ✓ Do not apply **QuickOne Epoxy Grout** at temperature above 50° C.
- ✓ Do not allow the residue to remain on the surface more than 24 hrs.
- ✓ Keep out reach of children.

TECHNICAL SPECIFICATIONS:

Properties	Result
Nature	Three Component (Hardener, Resin & filler)
Appearance Mixed	Various Coloured Pastes
Specific Gravity (Mixed)	1.72 +- 0.02
Pot Life	Min. 45 minutes @30°C
Setting Time	24 hours
Water Absorption	Nil
Mix Consistency	Smooth Paste








IMPORTANT NOTES: Keep the material cool and dry place. Adhesive should not be placed to direct sunlight. Performance of product may vary from site to site because of different weather conditions. Company will not be responsible for failure due to any in proper usage and application .



EPOXY TILE GROUT SPECIAL COLORS

EPOXY GROUT MIX SPARKLES COLORS

	Off White		Spartek Pink
	Ivory		Merry Pink
	Creamy White		Rose Pink
	Silky Beige		Copper Leaf
	Brown		Burgandy
	Pale Blue		Black
	Sky Blue		Red
	Alpine Blue		Terracotta
	Sapphire		Magenta
	Misty Green		Marble Beige
	Apple Green		Steel Grey
	Pista Green		Smoke Grey
	Dark Green		Dark Grey
	Lux Pink		Light Grey

EPOXY GROUT PURE SPARKLES COLORS

	Golden		Silver		Copper
---	--------	---	--------	--	--------

TILE GROUT

JOINT FILLER

QuickOne Tile Grout is the finest cementitious polymer based powder. Grout filler ready mix powder, manufactured by experts in the field. It is available on a range of 30 beautiful shades with 1Kg pouches. It is powder from material which requires only addition of water before use.

HOW TO APPLY:

A) SURFACE PREPARATION:

Joints in which **QuickOne Tile Grout** is to be applied should be cleaned & made free from any contaminants which will affect adhesion.

B) MIXING:

QuickOne Tile Grout Filler Powder should be used for filling any type tile joints only after 24 hours of fixing the tiles. Mix **QuickOne Tile Grout** with water in the ratio of three part powder and one part water by volume. Let the mixed paste of **QuickOne Tile Grout** remain in the pan for 10-15 minutes. Apply the paste to fill joints with a sponge/squeegee. Remove surplus paste of **QuickOne Tile Grout** with a damp sponge before it dries. Allow the tile grout to naturally cure (complete dry) for 24 hours after application.

C) APPLICATION:

- ✓ Mix **QuickOne Tile Grout** with water
- ✓ Apply by hand or with squeegee
- ✓ Clean tile area after 2 hours by sponge & by tile cleaner after 24 hours.

D) ADVANTAGES:

- ✓ Durable and excellent water proofing properties.
- ✓ It does not shrink or cause activities which accumulate dirt.
- ✓ It has excellent scratch resistance and mark resistance.
- ✓ Application is very simple and easy.
- ✓ Available with a range of colors
- ✓ Durable & economical.

PACKING:

1kg pouches with 20kg master bag

SHELF LIFE:

For better result use within 12 months from the date of manufacturing.

STORAGE:

Keep the material in a cool and dry place. Since it is cement based material, Tile Grout should not be exposed to atmospheric conditions. A partially used bag should be stored in airtight condition.

PRECAUTION:


After completion of work, clean tools and vessels with wet sponge before the material sets.

TECHNICAL SPECIFICATIONS:



Test Description	Result
Physical Appearance	Free Flowing Powder
Chemical Base	Cementitious dry powder modified with polymers
Mixing Ratio	1 p.b.w.water (p.b.w.- Parts by weight to 3 p.b.w.powder
Pot Life @ 27+- 1°C	1 hour
Setting Time	24 hours
Shades Available	30 Shades



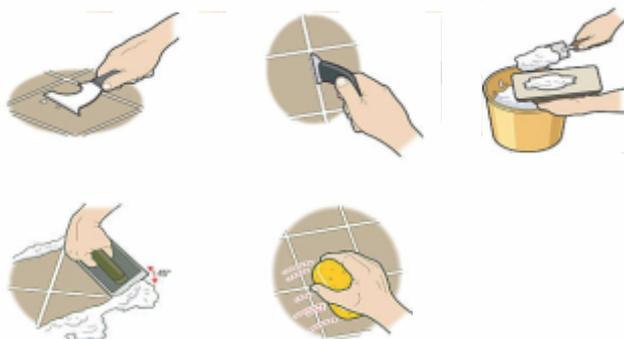IMPORTANT NOTES : Keep the material cool and dry place. Adhesive should not be placed to direct sunlight. Performance of product may vary from site to site because of different weather conditions. Company will not be responsible for failure due to any in proper usage and application.



STANDARD COLOR SHADES (TILE GROUT)

	Off White		Spartek Pink
	Ivory		Merry Pink
	Creamy White		Rose Pink
	Silky Beige		Copper Leaf
	Brown		Burgandy
	Pale Blue		Black
	Sky Blue		Red
	Alpine Blue		Terracotta
	Sapphire		Magenta
	Misty Green		Marble Beige
	Apple Green		Steel Grey
	Pista Green		Smoke Grey
	Dark Green		Dark Grey
	Lux Pink		Light Grey

TILE GROUT ADMIX

THICK MILKY WHITE

Tile Grout Admixture is a white colored liquid which creates an invisible shield to repel dirt so that it won't penetrate the grout. It has a unique, non-silicone formula that provides a curable substrate and a protective barrier against soil on tile grout under showers and restrooms. Treating floors and walls with **Tile Grout Admixture** ensures that surfaces are kept to a high standard of appearance with reduced maintenance.

HOW TO APPLY:

A) SURFACE PREPARATION:

Remove any large debris such as grease, dirt and other contaminants before coating, sweep with broom or brush. If extremely dirty, clean with tile cleaner. Rinse with clean water, and allow the surface to dry completely before applying.

ADVANTAGES:

- ✓ Non-gloss seal for porous grout.
- ✓ Contains no Volatile organic compounds.
- ✓ Water-based formula is easy to apply.

PACKING:

100ml, 200ml bottle, 500ml & 1 liter.

SHELF LIFE:

For better result use within 12 months from the date of manufacturing.

STORAGE:

Store in dry and cool place, away from direct sunlight.

PRECAUTION:

Do not over mix the material. Apply the second coat when the first coat is dry. For better result add 400ml of admixture to 1Kg grout

TECHNICAL SPECIFICATIONS:

Properties	Result
Colour	White
Scent	Mild
Appearance	Translucent
pH(Concentrate)	4.00-5.00
Dilution rate	Use as it is

IMPORTANT NOTES: Keep the material cool and dry place. Adhesive should not be placed to direct sunlight. Performance of product may vary from site to site because of different weather conditions. Company will not be responsible for failure due to any in proper usage and application.



TILE CLEANER

HEAVY DUTY TILE CLEANER

Tile Cleaner is an acid based degreaser. It effectively removes grease, soap, scum, tough stains and algae that have been subjected to heavy use. It removes cement & paint particles from the surface.

WHERE TO USE:

Use for cleaning of dirty ceramic tiles, vertified tiles & marble Stone.

HOW TO USE:

Apply solution to the surface to be cleaned. Allow for contact with the area for approx.. 7-9 minutes. Thoroughly brush in area treated with the solution. Mop up the solution and rinse well with water. Heavily solid area may require repeated application of Tile cleaner

ADVANTAGES:

- ✓ Easy to apply.
- ✓ It kills germs and removes tough stains from the surface.
- ✓ It is safe and environment friendly product.

PACKING:

500ml & 1 Liter with 10 Bottle of Box.

SHELF LIFE:

Tile cleaner has a shelf life of 12 months in unopened container.

STORAGE:

Store in dry condition & away from direct sunlight.

PRECAUTION:

Do not pour **Tile cleaner** into metal containers. Do not mix with other cleaner & chemicals or else the result can be dangerous.

TECHNICAL SPECIFICATIONS:

Properties	Result
Physical Appearance	Light green liquid
Odor	Slight odor
Foam Level	Low
Waiting time before rinsing	5 mins
Shelf life	Upto 1 year when stored in the originalsealed

IMPORTANT NOTES : Keep the material cool and dry place. Adhesive should not be placed to direct sunlight. Performance of product may vary from site to site because of different weather conditions. Company will not be responsible for failure due to any in proper usage and application .



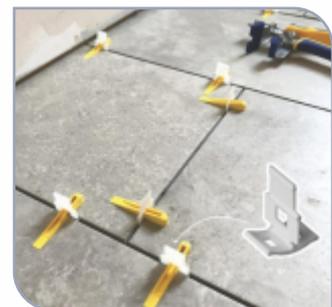
TILE SPACER

Why use Accurate tile spacers?

Accurate **Tile spacers** can aid in giving your job a accurate professional finish (as well as providing a variety of style/design options for your customer) and come in a range of shapes and sizes. Accurate tile spacers allow you to achieve a consistent pattern when fixing wall/floor tiles and help to ensure that all tiles are laid equidistant from each other (providing a symmetrical finish - as you or your customer would expect) in order for the grout to then be applied

How many sizes are available in Accurate tile spacers?

- ✓ 2mm tile spacer
- ✓ 3mm tile spacer
- ✓ 4mm tile spacer
- ✓ 5mm tile spacer
- ✓ 6mm tile spacer
- ✓ 8mm tile spacer



DISTRIBUTION NETWORK



**With the same quality and trust,
we have our presence in different
states of India**



SHREE JI ENTERPRISES

(An ISO-9001:2015 Company)

Manufacturer & Supplier of:

Tile Adhesives, Grouts, Admix, Epoxy,
Tile Cleaner & other Chemical Items



+91 807 902 1176



shreejihmh2024@gmail.com



www.quickone.in



H-54, RIICO Industrial Area, Phase 2,
Hanumangarh Junction, Rajasthan-335512

All instruction and information are provided by us for general guidance only and are believed to be accurate and complete. Users must exercise special care and caution depending on the conditions and particular purpose of usage and are responsible to ensure that they have consulted our latest literature.